

# Subsea


## Rotech S250

### Product Specifications

- 250hp Pump capacity: 4500gpm at 20m head - 2500gpm at 50m head.
- Can pass up to 2½" solids.
- Includes Jetting Ring with 22 Nozzles.
- The Rotech S250 is deployed using a vessel crane or A - frame.
- Powered by a compact HPU on deck.
- 200mm Outlet hose

### Applications

- Decommissioning & Abandonment Excavation
- Inspection, Repair & Maintenance Excavation
- Drill cuttings relocation
- Harbor and Channel Clearance

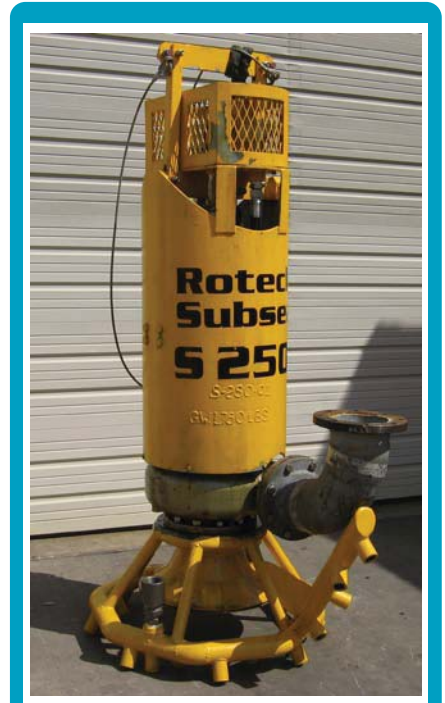

### Weights & Dimensions

	Length (m)	Width (m)	Height (m)	Weight (kg's)
Rotech S250	1	1	2	770
Hydraulic Power Unit	4	2.1	2.1	6350
Spares Container	6.1	2.4	2.4	7250
Hose Reel	2.1	2.1	2.4	6800